

Large Frame Reels | Nordic Heavy Duty Solutions

Reelcraft's Engineered Product Solutions

Full Flow Design

The goose neck is contoured to match the drum diameter, which allows smooth hose wrapping and unimpeded flow.

Long Service Life

Swivel incorporates a permanently lubricated ball bearing.

Adjustable Hose Tension

The brake can be adjusted to suit the application requirements.

Trouble-Free Rewinding

Chain and sprocket drive ensures smooth and consistent operation.

Meets or Exceeds Military Vibration for Truck Transport test.

MIL-STD-810F
500,000 mile equivalent

Long Service Life

The spool axial is supported by independent self-aligning bearing.

Free Rotation While Pressurized


The swing joint and spindle allows reel to freely rotate while fluid is pressurized.

Precise Rigid Construction

Proprietary unitized tie rods are zinc plated offering greater strength and resistance to vibration and corrosion.

Ultimate Corrosion Resistance

Individually powder coated components insure maximum coverage and resistance to corrosion. Stainless steel fasteners are standard.

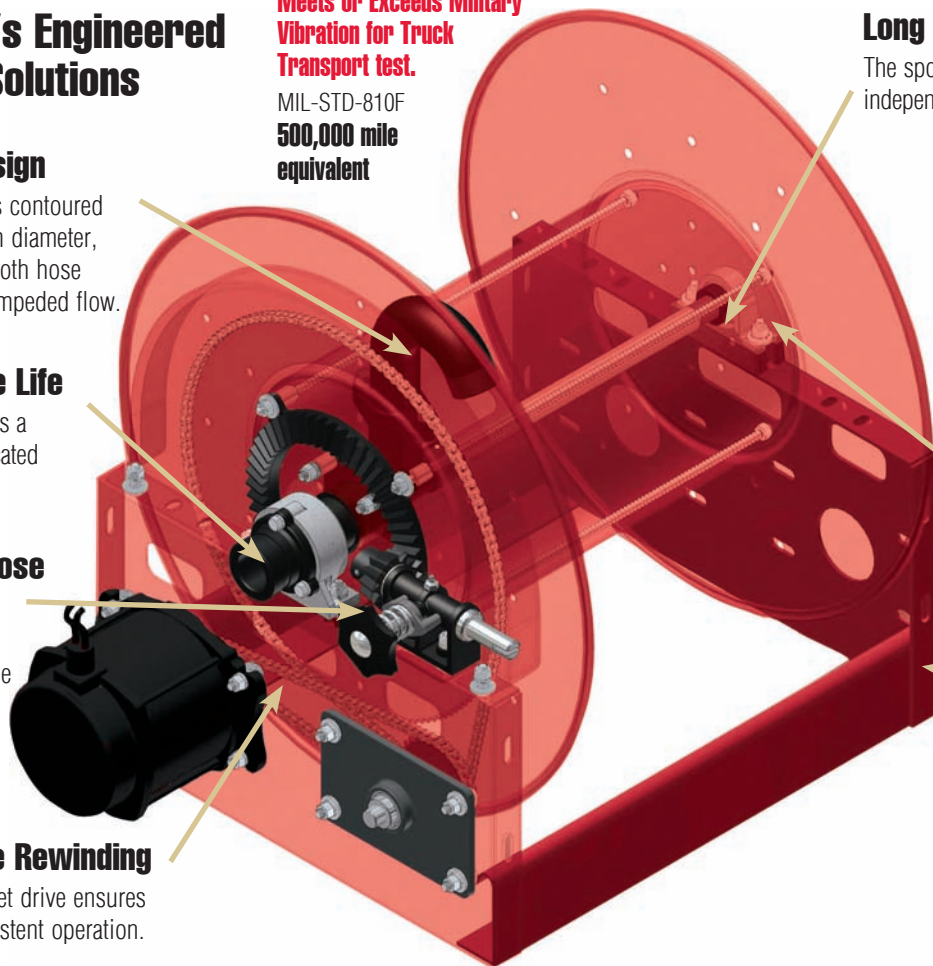

Drive Options	Series	Head Dia.	Drum Length	Thread Size	Inlet/Outlet Thread	Thread Style	Fluid Path Material	Pressure	Inlet Style	Fluid Path Location/Direction	Color Code					
E	12 V DC	1200	6"-36" in 2" increments	50	1/2"	FM	A	LP	1	1	R					
NJ	24 V DC	2400		75	3/4"							Female In/ Male Out	NP	0-600	Straight	Left Hand Top Wind
EP	*12 V DC Exp	3900		10	1"							Male Out	BP	600-1000	90°	Left Hand Bottom Wind
EA	*115 V AC Exp	3700		12	1 1/4"	FF	D	3K	5	3						
EX	*230 V AC Exp	5900		15	1 1/2"							Female In/Out	BT	1000-3000	1" LPG	Right Hand Top Wind
EJ	*24 V DC Exp			20	2"	Male In/ Female Out	S	5K	6	4						
HD	Hydraulic			25	2 1/2"	Male In/Out						6K	3001-5000	1 1/2" LPG	Right Hand Bottom Wind	
AF	1 1/2 HP Air			30	3"	VM	10K	15K								
AR	4 HP Air			40	4"							Female Out	VF	5001-6000		
BC	Bevel Crank															
HC	Hand Crank															
S	Storage															
CR	Cable Reel															
*Exp-Explosion proof motor																
Material Options/ Drive Size																
1/2" Pitch Chain		##5														
5/8" Pitch Chain		##6														
3/4" Pitch Chain		##7														
Gear Driven		##9														
Alum. Frame/Spool		##5#														
304 S.S. Frame/Spool		##9#														
316 S.S. Frame/Spool		##8#														
Sewer Cleaning Reel		##15														
Twin Hose		####T														

Additional Options
Idler
Chain Guard
Roller Bracket (Top)
Roller Bracket (Bottom)
Inboard Motor
Brake
Auxiliary Bevel Crank
Hose Boss (Guide)
Junction Box
Explosion Proof Switch
Solenoid
Circuit Breaker
Control Valve

Part No. Example: EP3900-23-28-15FFNPALP21-R00

EP(12VDC Electric Explosion Proof Motor)
 3900(Series 3900 Hose Reel)
 -23(23" Head Dia.) -28(28" Drum Length)
 -15(1-1/2" Thread Size) FF(Female In/Out Thread Type)
 NP(NPT Thread Style) A(Aluminum Fluid Path)
 LP(0-600 PSI) 2(90° Inlet)
 1(Left Hand Top Wind Fluid Path Location/Direction)
 R(Red)

NOTE: Not all options available in every combination. Actual assigned part numbers will vary. Please contact manufacturer for price and availability.