

Large Frame Reels | Nordic Heavy Duty Solutions

Reelcraft's Engineered Product Solutions

Full Flow Design

The goose neck is contoured to match the drum diameter, which allows smooth hose wrapping and unimpeded flow.

Long Service Life

Swivel incorporates a permanently lubricated ball bearing.

Adjustable Hose Tension

The brake can be adjusted to suit the application requirements.

Trouble-Free Rewinding

Chain and sprocket drive ensures smooth and consistent operation.

Meets or Exceeds Military Vibration for Truck Transport test.

MIL-STD-810F
500,000 mile equivalent

Long Service Life

The spool axial is supported by independent self-aligning bearing.

Free Rotation While Pressurized


The swing joint and spindle allows reel to freely rotate while fluid is pressurized.

Precise Rigid Construction

Proprietary unitized tie rods are zinc plated offering greater strength and resistance to vibration and corrosion.

Ultimate Corrosion Resistance

Individually powder coated components insure maximum coverage and resistance to corrosion. Stainless steel fasteners are standard.

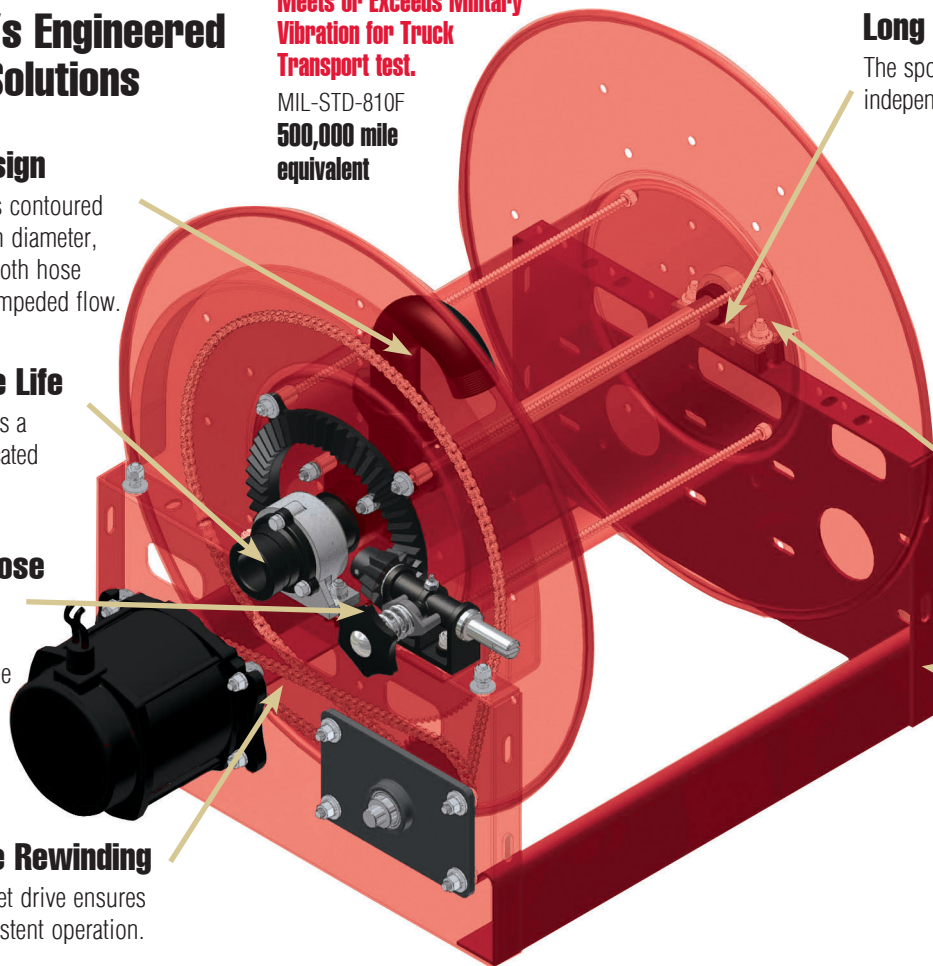

Drive Options	Series	Head Dia.	Drum Length	Thread Size	Inlet/Outlet Thread	Thread Style	Fluid Path Material	Pressure	Inlet Style	Fluid Path Location/Direction	Color Code										
E	12 V DC	1200	6"-36" in 2" increments	50	1/2"	FM	A	LP	1	1	R										
NJ	24 V DC	2400		75	3/4"							Female In/ Male Out	NP	Aluminum	0-600	Straight	Left Hand Top Wind				
EP	*12 V DC Exp	3900		10	1"							FF	Female In/Out	BT	BSPT	S	Stainless	3K	1000-3000	5	1" LPG
EA	*115 V AC Exp	3700		12	1 1/4"	MF	Male In/ Female Out	D	5K	6		11/2" LPG	4	Right Hand Bottom Wind							
EX	*230 V AC Exp	5900		15	1 1/2"										Male In/Out	1K	600-1000	2	90°	2	Left Hand Bottom Wind
EJ	*24 V DC Exp			20	2"										MM	Male In/Out	3K	3001-5000	5	1" LPG	3
HD	Hydraulic			25	2 1/2"	VM	Grooved fitting In/Male Out	S	6K	5001-6000											
AF	1 1/2 HP Air			30	3"										Female Out	10K	10,000				
AR	4 HP Air			40	4"										VF	Grooved fitting In/ Female Out	15K	15,000			

Additional Options

Idler
Chain Guard
Roller Bracket (Top)
Roller Bracket (Bottom)
Inboard Motor
Brake
Auxiliary Bevel Crank
Hose Boss (Guide)
Junction Box
Explosion Proof Switch
Solenoid
Circuit Breaker
Control Valve

Part No. Example: EP3900-23-28-15FFNPALP21-R00

EP(12VDC Electric Explosion Proof Motor)
 3900(Series 3900 Hose Reel)
 -23(23" Head Dia.) -28(28" Drum Length)
 -15(1-1/2" Thread Size) FF(Female In/Out Thread Type)
 NP(NPT Thread Style) A(Aluminum Fluid Path)
 LP(0-600 PSI) 2(90° Inlet)
 1(Left Hand Top Wind Fluid Path Location/Direction)
 R(Red)

NOTE: Not all options available in every combination. Actual assigned part numbers will vary. Please contact manufacturer for price and availability.

*Exp=Explosion proof motor
Material Options/ Drive Size
1/2" Pitch Chain ###5
3/8" Pitch Chain ###6
3/4" Pitch Chain ###7
Gear Driven ###9
Alum. Frame/Spool ##5#
304 S.S. Frame/Spool ##9#
316 S.S. Frame/Spool ##8#
Sewer Cleaning Reel ##15
Twin Hose ###T