

Heavy Duty Large Frame Reels Nordic Series 1200


1" fluid path for 1/2" through 1" I.D. hose

Rewind: Direct crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor. Crank is not supplied on power rewind models. A pin lock assembly is optional on manual rewind reels. A 3/8" pitch chain is standard.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint. Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2", 3/4", 1" female NPT. Other sizes and/or threads, including garden hose thread, can be furnished when specified.

The standard color for this series is red.

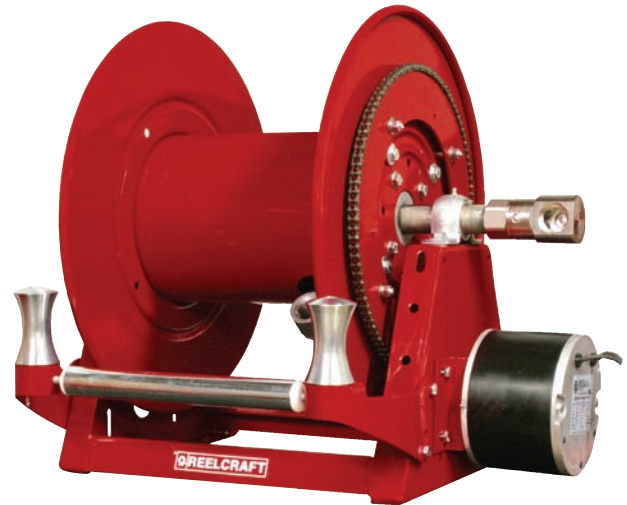


Shown with optional three-way roller bracket.

Nonexplosion-proof motor is standard "E" (pictured). Explosion proof (EP) motor is available upon request.



Built to order, not returnable.

Product temperatures range from -20 °F to +225 °F and standard pressures to 3000 psi. Other temperatures or pressures can be furnished at extra cost; consult manufacturer.

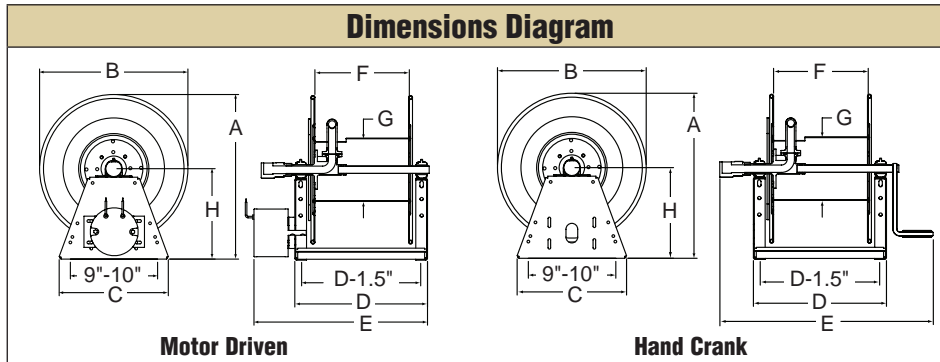

| Hose I.D. | | in | 1/2 | 3/4 | 1 | Specification - Hose Capacity and Reel Dimensions | | | | | | | | | | | | | | | | | | |
|------------|-------------|-----|-------|------|---------------|--|---------------|----|------|-----|-------|-----|-------|-------|------|-------|---------|-----|-------|------|--|--|--|--|
| Hose O.D. | | in | 0.875 | 1.28 | 1.563 | KEY: CRK = hand crank; "E" = nonexplosion-proof electric motor; EP = explosion-proof motor; AIR = air motor; BEVEL = bevel crank | | | | | | | | | | | | | | | | | | |
| | | mm | 22 | 33 | 40 | | | | | | | | | | | | | | | | | | | |
| Model | Hose Length | | | | Weight Crank* | Weight Motor* | Weight Bevel* | | A | B | C | D | E CRK | E "E" | E EP | E AIR | E BEVEL | F | G | H | | | | |
| 1200-19-6 | ft | 120 | 40 | 35 | 41 LB | 58 LB | 48 LB | in | 21.1 | 19 | 14 | 11 | 22 | 16.5 | 18.5 | 16 | 24 | 6 | 8 | 11.6 | | | | |
| | m | 37 | 12 | 11 | 19 KG | 26 KG | 22 KG | mm | 536 | 483 | 356 | 279 | 559 | 419 | 470 | 406 | 610 | 152 | 203 | 295 | | | | |
| 1200-19-12 | ft | 255 | 95 | 80 | 43 LB | 60 LB | 50 LB | in | 21.1 | 19 | 14 | 17 | 28 | 22.5 | 24.5 | 22 | 30 | 12 | 8 | 11.6 | | | | |
| | m | 78 | 29 | 24 | 20 KG | 27 KG | 23 KG | mm | 536 | 483 | 356 | 432 | 711 | 572 | 622 | 559 | 762 | 305 | 203 | 295 | | | | |
| 1200-19-18 | ft | 395 | 145 | 125 | 44 LB | 61 LB | 51 LB | in | 21.1 | 19 | 14 | 23 | 34 | 28.5 | 30.5 | 28 | 36 | 18 | 8 | 11.6 | | | | |
| | m | 120 | 44 | 38 | 20 KG | 28 KG | 23 KG | mm | 536 | 483 | 356 | 584 | 864 | 724 | 775 | 711 | 914 | 457 | 203 | 295 | | | | |
| 1200-19-22 | ft | 490 | 180 | 160 | 45 LB | 62 LB | 52 LB | in | 21.1 | 19 | 14 | 27 | 38 | 32.5 | 34.5 | 32 | 40 | 22 | 8 | 11.6 | | | | |
| | m | 149 | 55 | 49 | 20 KG | 28 KG | 24 KG | mm | 536 | 483 | 356 | 686 | 965 | 826 | 876 | 813 | 1016 | 559 | 203 | 295 | | | | |
| 1200-19-28 | ft | 630 | 220 | 190 | 46 LB | 63 LB | 53 LB | in | 21.1 | 19 | 14 | 33 | 44 | 38.5 | 40.5 | 38 | 46 | 28 | 8 | 11.6 | | | | |
| | m | 192 | 67 | 58 | 21 KG | 29 KG | 24 KG | mm | 536 | 483 | 356 | 838 | 1118 | 978 | 1029 | 965 | 1168 | 711 | 203 | 295 | | | | |
| 1200-23-6 | ft | 145 | 70 | 40 | 49 LB | 66 LB | 56 LB | in | 25.1 | 23 | 15.25 | 11 | 22 | 16.5 | 18.5 | 16 | 24 | 6 | 11.25 | 13.6 | | | | |
| | m | 44 | 21 | 12 | 22 KG | 30 KG | 25 KG | mm | 638 | 584 | 387 | 279 | 559 | 419 | 470 | 406 | 610 | 152 | 286 | 345 | | | | |
| 1200-23-12 | ft | 315 | 160 | 100 | 51 LB | 68 LB | 58 LB | in | 25.1 | 23 | 15.25 | 17 | 28 | 22.5 | 24.5 | 22 | 30 | 12 | 11.25 | 13.6 | | | | |
| | m | 96 | 49 | 30 | 23 KG | 31 KG | 26 KG | mm | 638 | 584 | 387 | 432 | 711 | 572 | 622 | 559 | 762 | 305 | 286 | 345 | | | | |
| 1200-23-18 | ft | 490 | 250 | 155 | 52 LB | 69 LB | 59 LB | in | 25.1 | 23 | 15.25 | 23 | 34 | 28.5 | 30.5 | 28 | 36 | 18 | 11.25 | 13.6 | | | | |
| | m | 149 | 76 | 47 | 24 KG | 31 KG | 27 KG | mm | 638 | 584 | 387 | 584 | 864 | 724 | 775 | 711 | 914 | 457 | 286 | 345 | | | | |
| 1200-23-22 | ft | 610 | 300 | 195 | 53 LB | 70 LB | 60 LB | in | 25.1 | 23 | 15.25 | 27 | 38 | 32.5 | 34.5 | 32 | 40 | 22 | 11.25 | 13.6 | | | | |
| | m | 186 | 91 | 59 | 24 KG | 32 KG | 27 KG | mm | 638 | 584 | 387 | 686 | 965 | 826 | 876 | 813 | 1016 | 559 | 286 | 345 | | | | |
| 1200-23-28 | ft | 780 | 370 | 240 | 54 LB | 71 LB | 61 LB | in | 25.1 | 23 | 15.25 | 33 | 44 | 38.5 | 40.5 | 38 | 46 | 28 | 11.25 | 13.6 | | | | |
| | m | 238 | 113 | 73 | 24 KG | 32 KG | 28 KG | mm | 638 | 584 | 387 | 838 | 1118 | 978 | 1029 | 965 | 1168 | 711 | 286 | 345 | | | | |

Refer to page 28 to build a representative model number. Final part number assigned upon quote. Refer to chart on page 31 for weight adders.

Reelcraft's reel configurator can quickly and accurately quote standard large frame reels.

Refer to page 27 for more information.