



## Hand Crank / Spring Retractable Cable Welding Reels Series CEA / WC



CEA30006

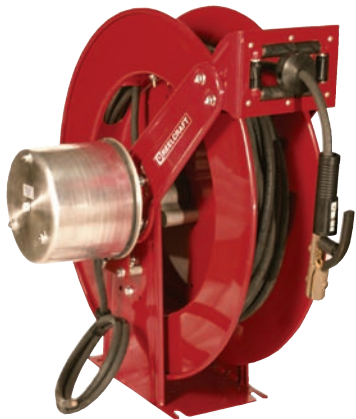

WC80001

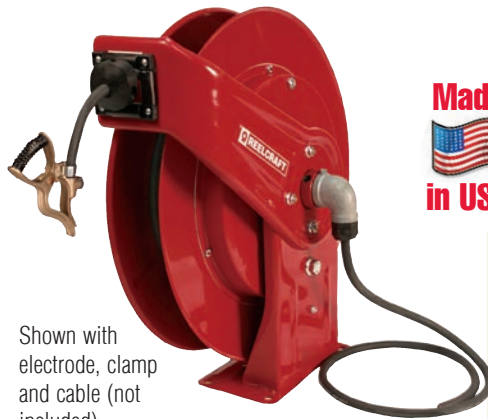

WC7000

Shown with electrode, clamp and cable (not included)



- Designed to improve safety in the work area with an increase in efficiency and productivity
- Cable reels have a current path through a continuous 400 or 700 AMP, 90 V DC (maximum) rated enclosed slip ring
- Welding cable reels store work lead or electrode lead, up to #4/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/Asc Z 49.1
- Stores cable when not in use, eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables, providing longer cable life
- Keeps work area and vehicles better organized, resulting in better space utilization

### Features - Hand Crank Reels

- ✓ All-bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

Size Index	Size Index					
	1		2		3	
	in	mm	in	mm	in	mm
A	20 1/4	514	20 1/4	514	25 3/8	645
B	19 3/4	502	19 3/4	502	24	610
C	7 7/8	200	7 7/8	200	10	254
D	3 7/8	98	3 7/8	98	6	152
E	13 1/4	337	14	356	15 5/8	397

Size Index	Size Index			
	4		5	
	in	mm	in	mm
A	6	152	12	305
B	9 3/4	248	15 3/4	400
C	11	279	17	432
D	15	381	21	533
E	21	533	27	686

Four 1/2" (12.7 mm) diameter mounting holes.

### Caution:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.

### Available Options

#### Roller Guides

See page 47



#### Replacement Bumpers

See page 49



Model without cable & bumper	Cable Size												Amps	Shipping Weight	Size Index #	
	#2 (34mm <sup>2</sup> )		#1 (42mm <sup>2</sup> )		#1/0 (54mm <sup>2</sup> )		#2/0 (67mm <sup>2</sup> )		#3/0 (85mm <sup>2</sup> )		#4/0 (107mm <sup>2</sup> )					
	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m				
CEA30006	300	91	250	76	200	61	150	46	-----	-----	-----	-----	400	46	21	4
CEA30012	500*	152	500*	152	400	122	300	91	-----	-----	-----	-----	400	54	24	5
WC7000	-----	-----	50	15	50	15	50	15	-----	-----	-----	-----	400	58	26	1
<b>NEW</b> WCH7000	-----	-----	-----	-----	-----	-----	-----	-----	50	15	50	15	700	58	26	2
WC80001	-----	-----	75	23	75	23	75	23	-----	-----	-----	-----	400	102	46	3
WC80002	-----	-----	100	30	-----	-----	-----	-----	-----	-----	-----	-----	400	104	47	3
<b>NEW</b> WCH80001	-----	-----	-----	-----	-----	-----	-----	-----	75	23	75	23	700	102	46	3

\*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel. Reference page 4 for guide arm positions.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse