

# New Product Announcement | Series CTJ


## Medium Duty Hand Crank Jetter Reels Series CTJ

Reelcraft's Series CTJ hose reels are designed for medium duty applications that require longer lengths of high pressure air and water hose. Hand crank with a balanced brass swivel and brass inlet, the Series CTJ is the product of lighter weight components and forward-thinking design. Reels in this family benefit from a tough corrosion resistant powder coat paint. All reels feature a drag brake to prevent de-spooling when reel is not in use. Series CTJ is an economical choice for storing and retrieving hose.



CTJ6200 HN

- **Superior corrosion resistance** - Individually powder coated components offer the maximum protection from premature corrosion.
- **Economical cost** - The simple, effective and efficient design allows for economical storage and retrieval of hose.
- **Easy to operate** - The rotating handle allows the hose to be retrieved with ease.
- **Easy to mount** - The 6 slotted holes in the base make the reel easy to mount and adjust.

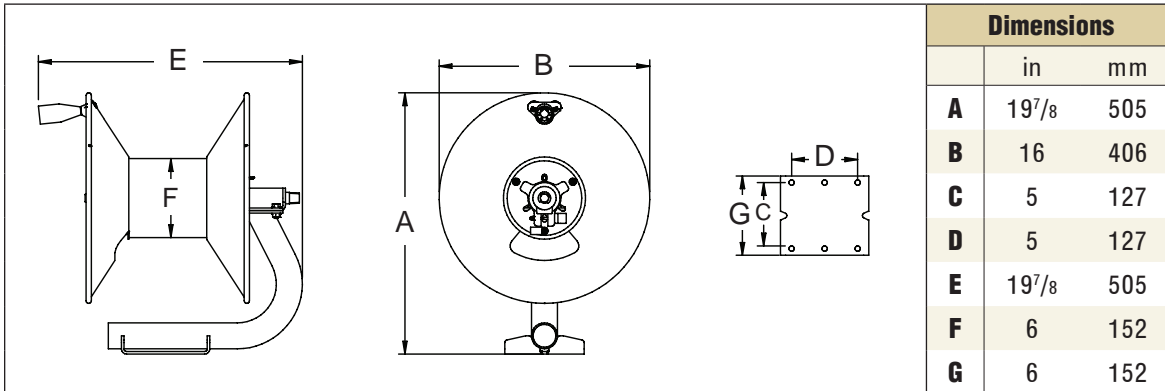

### Related Products

Reelcraft offers a complete line of over 2,500 hose, cord and cable reels. For more information visit us online at [www.reelcraft.com](http://www.reelcraft.com).

|  | in                 | mm | in   | mm | Pressure | (F)NPTF<br>Reel Outlet | (M)NPTF<br>Reel Inlet | Shipping Weight |    |
|--|--------------------|----|------|----|----------|------------------------|-----------------------|-----------------|----|
|  |                    |    |      |    |          |                        |                       | lbs             | kg |
| <b>Hose I.D.</b>   | 3/8                | 10 | 1/2  | 13 |          |                        |                       |                 |    |
| <b>Hose O.D.</b>   | .750               | 19 | .850 | 22 |          |                        |                       |                 |    |
| <b>Model without hose</b>  | <b>Hose Length</b> |    |      |    | psi bar  | in                     | in                    | lbs             | kg |
|  | ft                 | m  | ft   | m  |          |                        |                       |                 |    |
| <b>High Pressure Wash Reels</b> Maximum Temperature 210 °F (99 °C) |                    |    |      |    |          |                        |                       |                 |    |
| <b>CTJ6200HN</b>   | 200                | 61 | 150  | 46 | 5000 345 | 3/8                    | 1/2                   | 28              | 13 |

Reelcraft Industries is  
**ISO 9001:2008**  
Certified Since 1996