

New Product Announcement | Series LS 5000

Heavy Duty Stainless Steel Cord Reels

NEW!


Reelcraft's new stainless steel power cord reels are designed for applications where corrosion or sanitation are a concern. The heavy gauge 304L stainless steel provides an easy to clean finish and superior corrosion resistance. A robust collector ring assures maximum conductivity current flow. All reels listed include a 4-5' pigtail, multi-positional guide arm, and adjustable cord stop. Models listed are for indoor, non-weather-tight applications only.



LS 5445 123 3M-WC

Features

- ✓ **Quiet** - These reels utilize a cam latching system, making them much quieter and smoother than other reels in their class.
- ✓ **Compact** - A space saving design makes them ideal for minimum space requirements.
- ✓ **Superior strength** - A robotically welded base, engineered structural supports and high-grade industrial 304L stainless steel combine to give this reel superior strength and stability.
- ✓ **Long life drive spring** - Declutching arbor virtually eliminates possibility of spring damage due to reverse winding. Only the highest quality spring steel is used and conditioned to insure there are no imperfections offering maximum service life.

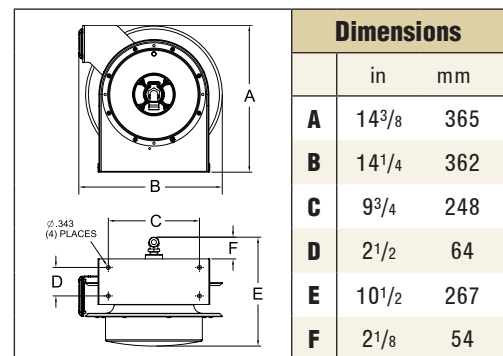

Model with Cord	Cord Ending	Cord Specifications						Volts	Amps	Shipping Weight	
		AWG	mm ²	# Cond.	ft	m	Type			lbs	kg
LS 5445 123 3	Single Receptacle	12	3.32	3	45	14	SJEOOW	125	15	31	14
LS 5445 123 3A	Single Receptacle	12	3.32	3	45	14	SJEOOW	125	20	32	15
LS 5425 123 3M-WC*	Single Medical Grade Receptacle	12	3.32	3	25	8	SJEOOW	125	15	30	14
LS 5445 123 3M-WC*	Single Medical Grade Receptacle	12	3.32	3	45	14	SJEOOW	125	15	32	15
LS 5415 123 3M	Single Medical Grade Receptacle	12	3.32	3	15	5	SJEOOW	125	15	28	13
LS 5425 123 3M	Single Medical Grade Receptacle	12	3.32	3	25	8	SJEOOW	125	15	29	13
LS 5445 123 3M	Single Medical Grade Receptacle	12	3.32	3	45	14	SJEOOW	125	15	31	14
LS 5445 123 7	Duplex Outlet Box w/GFCI (F)**	12	3.32	3	45	14	SJEOOW	125	15	33	15
LS 5445 123 7A	Duplex Outlet Box w/GFCI (F)**	12	3.32	3	45	14	SJEOOW	125	20	33	15
LS 5445 123 7B	Duplex Outlet Box	12	3.32	3	45	14	SJEOOW	125	20	33	15
LS 5445 123 9	Triple Tap	12	3.32	3	45	14	SJEOOW	125	15	32	15
LS 5445 123 9G	Triple Tap w/GFCI (F)**	12	3.32	3	45	14	SJEOOW	125	15	33	15
LS 5400	Bare Reel	12	3.32	3	45	14	SJEOOW	125	20	24	11
LS 5425 123 X	Flying Lead	12	3.32	3	25	8	SJEOOW	125	20	27	12
LS 5445 123 X	Flying Lead	12	3.32	3	45	14	SJEOOW	125	20	29	13

For indoor non-weather tight applications only. *Reel includes white cord and white electrical enclosure. **The GFCI Receptacle is designed to protect from line-to-ground shock hazards. The Ground Fault Circuit Interrupter does not protect against short circuits or overloads; this is the function of the fuse or circuit breaker.