

# New Product Announcement | Garden Center Reels

## Garden Center Reels

These reels are designed to be mounted centrally and used for watering and washdown. They offer longer lengths of larger I.D. hose, are spring driven, and come equipped with garden hose end fittings (designated by an NH). Most featured models\* include hose, bumper and inlet hose, providing a reel solution out of the box. \*7850 OLPSW57 - does not include inlet hose.

### Benefits

- **Long Spring Life** - Spring is made from high quality spring steel and conditioned to remove imperfections.
- **Structural Strength** - Reel components are made from industrial grade steel and ribs are added to give added stability.
- **Ease of Use** - Guide arm is easily adjustable to numerous positions. Hose bumper maintains desired working hose length.
- **Corrosion Resistant** - Parts are individually powder-coated for high quality, uniform paint adhesion. The result is a brilliant abrasion/corrosion resistant finish that keeps these reels looking new through years of use.


### Related Products

Reelcraft offers a complete line of hose, cord and cable reels at a superior value. For a complete product listing visit us online at [www.reelcraft.com](http://www.reelcraft.com) or call toll free 800-444-3134.



GCEA33118 L12D

Series GC motor driven reels also include hose roller guide, operating switch (#S600808) and chain guard.

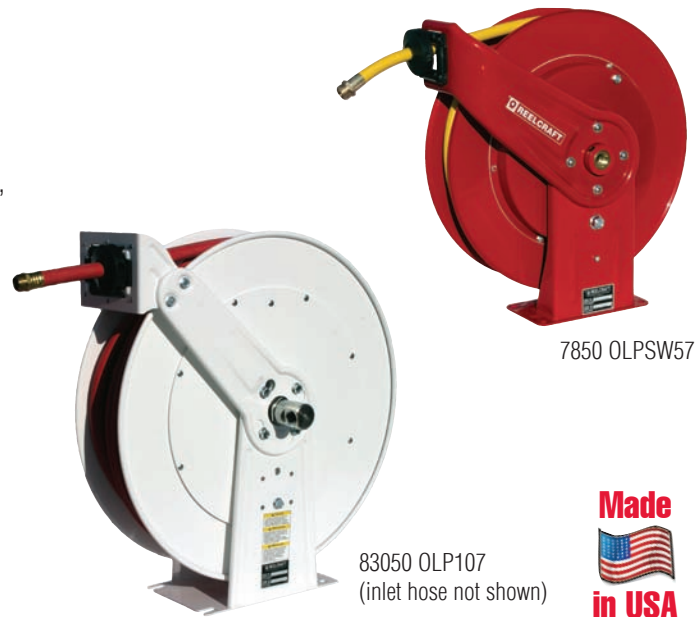

7850 OLPSW57

83050 OLP107  
(inlet hose not shown)



### Hose Assemblies

Part Number	Hose I.D.		Hose O.D.		End Fitting (M)	Pressure		Length		Weight	
	in	mm	in	mm		in	psi	bar	ft	m	lbs
S601053-50	1/2	13	.810	21	1/2 NPT x 3/4 NH	300	21	50	16	9	4
601046-100	5/8	16	1.00	26	3/4 NPTF x 3/4 NH	200	14	100	30	28	13
601046-125	5/8	16	1.00	26	3/4 NPTF x 3/4 NH	200	14	125	38	35	16
601046-175	5/8	16	1.00	26	3/4 NPTF x 3/4 NH	200	14	175	53	49	22
600830-10	3/4	19	1.18	31	3/4 NPTF(F) x 3/4 NH	250	18	10	3	4	2
601044-100	3/4	19	1.18	31	3/4 NPTF x 3/4 NH	300	21	100	30	25	11
601044-150	3/4	19	1.18	31	3/4 NPTF x 3/4 NH	300	21	150	46	38	17
S601065-50	1	25	1.38	35	1(F) x 1 NH	250	18	50	16	21	10
S601065-100	1	25	1.38	35	1(F) x 1 NH	250	18	100	30	42	19

Model with hose	Hose I.D.		Hose O.D.		(M) Outlet	(F) Inlet	Pressure		Hose Length		Weight		Inlet Hose
	in	mm	in	mm	in	in	psi	bar	ft	m	lbs	kg	
<b>Spring Driven Water Hose Reels</b> Maximum temperature 150 °F (65 °C)													
7850 OLPSW57	1/2	13	.810	21	3/4 NH	3/4 NH	300	21	50	16	51	24	NA
GC7535 OLP	5/8	16	1.00	26	3/4 NH	3/4 NH	250	18	35	11	53	24	600830-10
83050 OLP107**	5/8	16	1.00	26	3/4 NH	3/4 NH	250	18	50	16	88	40	601048-6
83075 OLP107**	5/8	16	1.00	26	3/4 NH	3/4 NH	250	18	75	22	89	40	601048-6
GC85100 OLP	5/8	16	1.00	26	3/4 NH	3/4 NH	250	18	100	30	95	43	600830-10
GC7925 OLP	3/4	19	1.075	27	3/4 NH	3/4 NH	250	18	25	8	53	25	600830-10
GC83050 OLP	3/4	19	1.075	27	3/4 NH	3/4 NH	250	18	50	16	89	41	600830-10
GCD83075 OLP	3/4	19	1.075	27	3/4 NH	3/4 NH	250	18	75	22	102	46	600830-10
GCD84050 OLP	3/4	19	1.37	35	1 NH	1 NH	250	18	50	16	103	47	S600982-10

Model without hose	Hose I.D.		Hose O.D.		(M) Outlet	(F) Inlet	Pressure		Capacity		Weight		Inlet Hose
	in	mm	in	mm	in	in	psi	bar	ft	m	lbs	kg	
<b>Hand Crank Water Hose Reels</b> Maximum temperature 150 °F (65 °C)													
GCCA33106 L	3/4	19	1.075	27	3/4 NH	3/4 NPT	300	21	50	15	41	19	600830-10
GCCA33112 L	3/4	19	1.075	27	3/4 NH	3/4 NPT	300	21	100	31	47	21	600830-10
GCCA33118 L	3/4	19	1.075	27	3/4 NH	3/4 NPT	300	21	175	54	52	24	600830-10
GCCB37118 L	1	25	1.37	35	1 NPT	1 NH	300	21	100	31	55	25	S600982-10
GCCB37128 L	1	25	1.37	35	1 NPT	1 NH	300	21	150	45	66	30	S600982-10
<b>Electric 12 V DC Motor Driven Water Hose Reels</b> Maximum temperature 150 °F (65 °C)													
GCEA33112 L12D	3/4	19	1.075	27	3/4 NH	3/4 NPT	300	21	100	31	65	29	600830-10
GCEA33118 L12D	3/4	19	1.075	27	3/4 NH	3/4 NPT	300	21	175	54	69	32	S601034-10
GCEB37118 L12D	1	25	1.37	35	1 NPT	1 NPT	300	21	100	31	69	32	S600982-10

\*\*Reels are painted white.