

# New Product Announcement | Retail Reels

## Reels for Retail Installations White hose, cord or cable reels

All Reelcraft reels are individually powder coated with our TGIC FREE bright red paint on standard models. Reels for applications such as retail outlets, garden centers, dock areas, etc. may require a reel that better blends into the surrounding environment. For these types of applications, our reels for retail installations painted white are ideal. The neutral color allows for the reels to blend better with the walls or ceiling used for mounting. Reelcraft also offers many other special order colors and will gladly paint any color of your choosing.

### Benefits

- **Durability** - Premium industrial grade reels made from high quality components maintain their aesthetics through years of use.
- **High Quality Finish** - Components are individually powder coated prior to assembly for a uniform, corrosion-resistant finish.
- **Convenience** - Reels provide power, air and/or water where and when you need it without the drawback of unsightly and hazardous hoses, cords or cables piled on the ground.

### Related Products


Reelcraft offers a comprehensive line of hose, cord and cable reels for almost every application. For more information visit us online at [www.reelcraft.com](http://www.reelcraft.com) or call toll free 800-444-3134.



L 4545 123 3-17WH-WC



L 5550 123 3A-17WH-WC

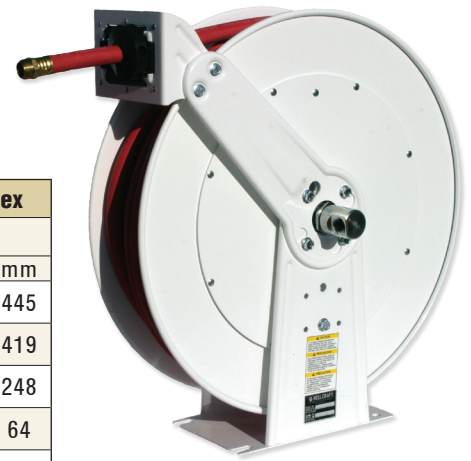

D83075 OLP-17WH

Diagram	Dimensions - Size Index			
	1		2	
	in	mm	in	mm
A	20 <sup>1</sup> / <sub>4</sub>	514	25 <sup>3</sup> / <sub>8</sub>	645
B	19 <sup>3</sup> / <sub>4</sub>	502	24	610
C	17 <sup>13</sup> / <sub>16</sub>	198	10 <sup>1</sup> / <sub>2</sub>	267
D	3 <sup>7</sup> / <sub>8</sub>	98	7 <sup>7</sup> / <sub>8</sub>	200
E	7	178	13	330

Diagram	Dimensions - Size Index			
	3		4	
	in	mm	in	mm
A	13 <sup>1</sup> / <sub>4</sub>	337	17 <sup>1</sup> / <sub>2</sub>	445
B	12 <sup>5</sup> / <sub>8</sub>	321	16 <sup>1</sup> / <sub>2</sub>	419
C	8	203	9 <sup>3</sup> / <sub>4</sub>	248
D	2 <sup>1</sup> / <sub>2</sub>	64	2 <sup>1</sup> / <sub>2</sub>	64
E	9 <sup>3</sup> / <sub>8</sub>	239	10 <sup>1</sup> / <sub>2</sub>	267

Model with hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight		Size Index
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg	
Low Pressure Air/Water Stainless Steel Reels Maximum Temperature 150 °F (65 °C)																
7650 OLP-17WH	43	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	7600 OLP-17WH	40	18	3
7850 OLP-17WH	47	21	1/2	16	.750	19	50	15	300	21	3/8	1/2	7800 OLP-17WH	41	19	3
D83075 OLP-17WH	102	46	3/4	19	1.075	27	75	23	250	17	3/4	3/4	D83000 OLP-17WH	83	38	4

Low pressure hose reels furnished with PVC hose.



Model with cable	Cord Ending	Cord Specifications				Volts	Amps	Shipping Weight		Size Index
		AWG	mm	# Cond	ft m			Type	lbs	
L 4545 123 3-17WH-WC	Single Receptacle	12	3.32	3	45 14	SJEOOW	125	15	28 13	3
L 4545 123 3A-17WH-WC	Single Receptacle	12	3.32	3	45 14	SJEOOW	125	20	28 13	3
L 5550 123 3-17WH-WC	Single Receptacle	12	3.32	3	50 15	SJEOOW	125	15	44 20	4
L 5550 123 3A-17WH-WC	Single Receptacle	12	3.32	3	50 15	SJEOOW	125	20	44 20	4

For indoor non-weather tight applications only. Series L4000 and L5000 models UL listed at 125 Volt 60Hz single phase. Note: swing brackets should be used if cord/cable is pulled at greater than a 45 degree angle from reel.